

12500 TI Boulevard, MS 8640, Dallas, Texas 75243

PCN# 20131025001C

Qualification of Vanguard Facility as an additional FAB site source for select OPA340xx and OPA2336xx devices in the 0.60UM Process Technology Change Notification / Sample Request

Dear Customer:

The purpose of Revision C is to correct the devices listed in the Product Affected Section. We apologize for any confusion this may have created.

This is an announcement of a change to a device that is currently offered by Texas Instruments. The details of this change are on the following pages.

We request you acknowledge receipt of this notification within **30** days of the date of this notice. Lack of acknowledgement of this notice within 30 days constitutes acceptance of the change. If you require samples or additional data to support your evaluation, please request within 30 days.

The changes discussed within this PCN will not take effect any earlier than **90** days from the date of this notification, unless customer agreement has been reached on an earlier implementation of the change. This notification period is per TI's standard process.

This notice does not change the end-of-life status of any product. Should product affected be on a previously issued product withdrawal/discontinuance notice, this notification does not extend the life of that product or change the life time buy offering/discontinuance plan.

For questions regarding this notice, contact your local Field Sales Representative or the PCN Manager (PCN www admin team@list.ti.com).

Sincerely,


PCN Team SC Business Services Phone: +1(214) 480-6037 Fax: +1(214) 480-6659

PCN# 20131025001C Attachment: 1

Products Affected:

According to our records, there are the affected device(s) that you have purchased within the past twenty-four (24) months. Technical details of this Product Change follow on the next page(s).

PCN Nu	PCN Number: 20131025001C PCN Date: 05/16/201							e: 05/16/2014				
Title: Qualification of Vanguard Facility as an additional FAB site source for select OPA340xx and OPA2336xx devices in the 0.60UM process technology												
Custom	er Contact:	PCN N	lanager			Phone	e:	+1(214)480-6	037	Dept:		Quality Services
								timated Sam				Date provided at
*Propos	ate:	08/16	5/20	14			ailability:				sample request.	
Change	Change Type:											
	embly Site	-1		П	D	esign				Wafer B	Bu	mp Site
	embly Process			П	Data Sheet							mp Material
	embly Materia	s		П	Part number change							mp Process
	hanical Specif								Wafer Fab Site			
	king/Shipping/			Ħ		Test Process			Ħ	Wafer Fab Materials		
	<u> </u>								Wafer Fab Process			
						PCN	De	etails				
Doccrin	tion of Chang	101				r CIT		cans				
Descrip	don or chang	C.										
should have listed your affected device(s) accurately. This notification is to announce the qualification of the Vanguard fabrication facility as an additional wafer FAB source for select OPA340xx and OPA2336xx devices listed in "Product Affected" section.												
	Currently Qualified Sites, Process, wafer dia. Additional Site, Process, wafer dia.											
TMSC-WF2, 0.60UM, 200mm Vanguard, VIS .5UM/0.6UM DPDM, 200mm												
Qualification details are provided in the Qual Data Section.												
Reason for Change:												
Continuit	y of Supply											
Anticipated impact on Form, Fit, Function, Quality or Reliability (positive / negative):												
None												
Changes to product identification resulting from this PCN:												
Current												
С	hip Site	Chip	site co	ode (20L	_)	Ch	nip country code	(21L	.)		
TS	MC-WF2		TS	2				TWN				
New												
	hip Site	Chip	site co	ode (20L	_)	Ch	nip country code	(21L	.)		
Vang	uard (VIS)		VA	N				TWN				
<u> </u>												
Sample product shipping label (not actual product label)												

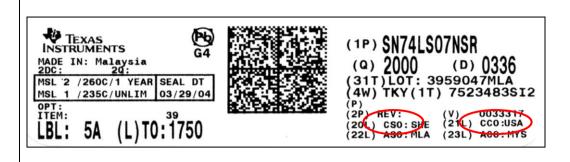

Product Affected: Corrected Device List						
OPA2336EA/250	OPA2336P	OPA340UA/2K5G4	OPA2336E/250G4			
OPA2336EA/2K5G4	OPA340UA	OPA2336E/2K5G4	OPA2336UAG4			
OPA2336UA/2K5G4	OPA2336U	OPA2336UA	OPA340PAG4			
OPA340UA/2K5	OPA2336EA/2K5	OPA340NA/3KG4	OPA2336PG4			
OPA340PA	OPA2336PA	OPA340NA/250	OPA2336UG4			
OPA2336UA/2K5	OPA2336EA/250G4	OPA340NA/250G4	OPA340-W			
OPA2336U/2K5	OPA2336E/2K5	OPA340NA/3K	OPA2336PAG4			
OPA2336U/2K5G4	OPA340UAG4	OPA2336E/250				

Qualification Report

OPA340 and OPA2336 will transfer from TSMC Fab 2 to Vanguard aka VIS FAB - qualified process flow (0.5um/0.6um) model transfer from TSMC FAB2 Approved04/26/2014

Product Attributes

Attributes	Qual Device: OPA2336EA	Qual Device: OPA340NA	QBS Process: DDC112Y	QBS Process: TSC2046IPW	QBS Process: OPA356AQDBVRQ1
Assembly Site	ASESH	NS2	CRS	TAI	NFME
Package Family	VSSOP	SOT	TQFP	TSSOP	SOT
Flammability Rating	UL 94 V-0	UL 94 V-0	UL94 Class V-0	UL94 Class V-0	UL 94 V-0
Wafer Fab Supplier	Vanguard	Vanguard	Vanguard	Vanguard	Vanguard
Wafer Fab Process	0.5/0.6UM	0.5/0.6UM	0.5/0.6UM	0.5/0.6UM	0.5/0.6UM

- QBS: Qual By Similarity
- Qual Device OPA2336EA is qualified at LEVEL2-260C
- Qual Device OPA340NA is qualified at LEVEL1-260C

Test Name / Condition	Duration	Qual Device: OPA2336EA	Qual Device: OPA340NA	QBS Process: DDC112Y	QBS Process: TSC2046IPW	QBS Process: OPA356AQDBVRQ1
Biased HAST, 130C/85%RH	96 Hours	-	-	1/77/0	1/77/0	2/154/0
Autoclave 121C	96 Hours	-	-	1/77/0	1/77/0	2/154/0
Unbiased HAST 130C/85%RH	Inbiased HAST 96 Hours		-	-	-	1/77/0
Temperature Cycle, - 65/150C	500 Cycles	-	-	1/77/0	1/77/0	2/153/0
High Temp Storage Bake 175C	500 Hours	-	-	-	-	1/45/0
High Temp Storage Bake 1000 Hours				1/77/0	-	-
High Temp Storage Bake 420 Hours		-	-	-	1/77/0	-
Life Test, 150C	1000 Hours	-	-	1/116/0	-	-
Life Test, 125C	1000 Hours	-	-	-	-	2/158/0
Early Life Failure Rate, 125C	48 Hours	-	-	-	-	3/2400/0
ESD - HBM	1000 V	1/3/0	1/3/0	1/3/0	1/3/0	-
ESD - CDM	250 V	1/3/0	1/3/0	1/3/0	1/3/0	1/3/0
Latch-up	(per JESD78)	1/6/0	1/6/0	1/6/0	-	1/6/0
Electrical Distributions Cpk>1.67 Roor hot, and cold te		-	-	-	-	1/90/0
Electrical Per Datasheet Characterization Parameters		1/Pass	1/Pass	1/Pass	1/Pass	-

⁻ Preconditioning was performed for Autoclave, Unbiased HAST, THB/Biased HAST, Temperature Cycle, Thermal Shock, and HTSL, as applicable

Green/Pb-free Status:
Qualified Pb-Free(SMT) and Green

For questions regarding this notice, e-mails can be sent to the regional contacts shown below or your local Field Sales Representative.

Location	E-Mail
USA	PCNAmericasContact@list.ti.com
Europe	PCNEuropeContact@list.ti.com
Asia Pacific	PCNAsiaContact@list.ti.com
Japan	PCNJapanContact@list.ti.com

⁻ The following are equivalent HTOL options based on an activation energy of 0.7eV: 125C/1k Hours, 140C/480 Hours, 150C/300 Hours, and 155C/240 Hours

- The following are equivalent HTSL options based on an activation energy of 0.7eV: 150C/1k Hours, and 170C/420 Hours

⁻ The following are equivalent Temp Cycle options per JESD47: -55C/125C/700 Cycles and -65C/150C/500 Cycles Quality and Environmental data is available at TI's external Web site: http://www.ti.com/